


Remanufacturing Instructions


Samsung CLP500/550 Reset Resistor

For Technical Support, please call (800) 322-8992 ext 110.


1. Use a small screw driver to release the two locking pins that secure the contact assembly to the cartridge (Fig. 1).

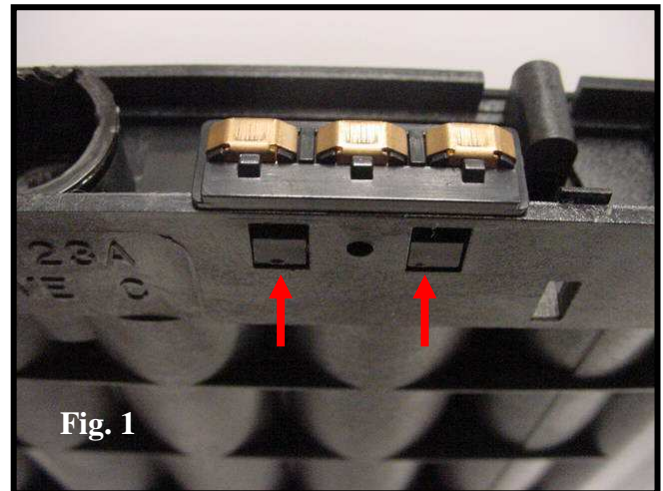

2. Use a soldering iron to remove the resistor from the two contact points (Fig. 2).

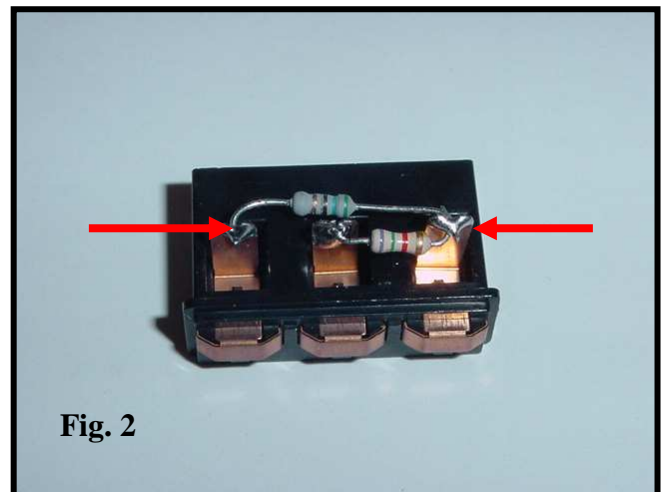

3. Place the contact housing in a secure device. Use needle nose pliers to hold the resistor wire. Heat the solder to remove the resistor on both contacts as indicated (Fig. 3).

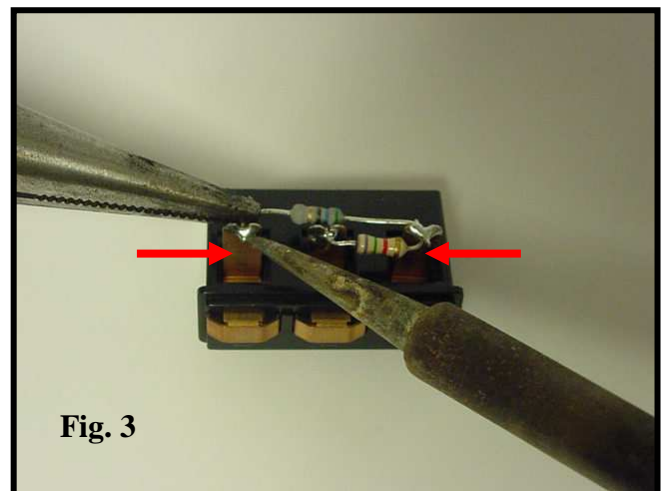

4. Once the resistor is removed, clean both contact points of remaining solder.

NOTE: Make sure that the remaining resistor is still soldered to the two contact points (Fig. 4). If this resistor is not making contact, the printer will not recognize the cartridge.

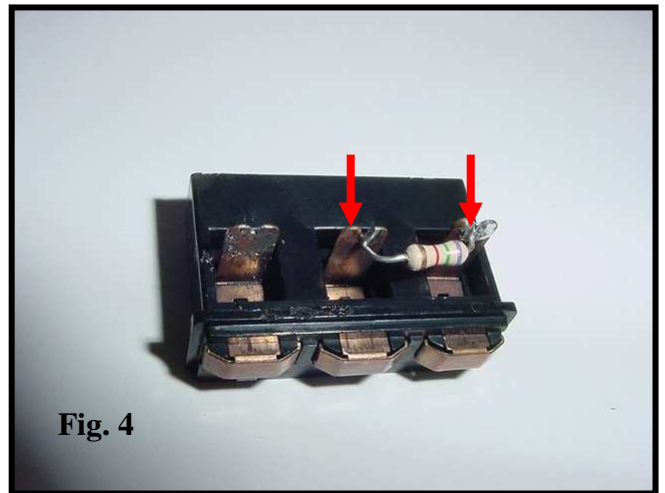


Fig. 4

5. Connect the new resistor Oasis Part# SCCHCLP550 (Fig. 5) to the 2 contacts tabs (Fig. 5a).

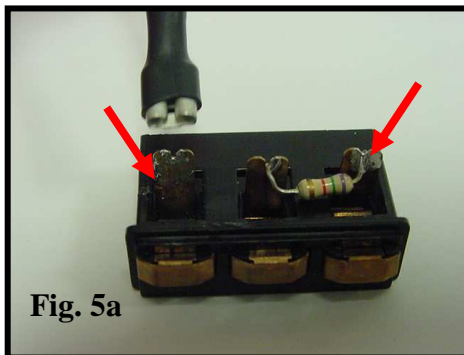


Fig. 5a



Fig. 5

6. Once the resistor is connected to both contacts, snap the housing back into the cartridge (Fig. 6).



Fig. 6

Oasis and You ... Succeeding Together!



| | | | | | | |
|----------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| New Hampshire | Illinois | Texas | California | Canada | Miami | Europe |
| (800) 322-8992 | (800) 322-8992 | (800) 322-8992 | (800) 322-8992 | (800) 322-8992 | (800) 322-8992 | +31-24-3882233 |
| Fx: (603) 598-4277 | Fx: (972) 692-6976 | Fx: (972) 692-6976 | Fx: (718) 908-7788 | Fx: (972) 692-6976 | Fx: (603) 386-7575 | Fx: +31-24-3557373 |

© 2007 Oasis Imaging Products, Inc. Any attempt to reproduce any part of these instructions without the written consent of Oasis Imaging Products, Inc. may result in legal action. All registered trademarks are the property of their respective owners.